


SPECIFICATIONS



base code	DOS S
typology	Recessed Adjustable LED luminaire.
construction	Aluminum Die Cast
reflector finish	Gold (G), Black High Gloss (BG), Silver High Gloss (SG), White (W), Chrome (C), Black Matt (BM)
trim finish	Black (B)/ White (W)
lamp wattage	8.5W
delivered lumens	830lm / 860lm / 870lm
CCT	2700K / 3000K / 4000K
beam	40°
binning	< 3
CRI	> 90
life	50.000h
IP	IP20
dimming options	Phase-cut Dim, 0-10V, DALI, Dim to Warm. Power supply to be ordered separately

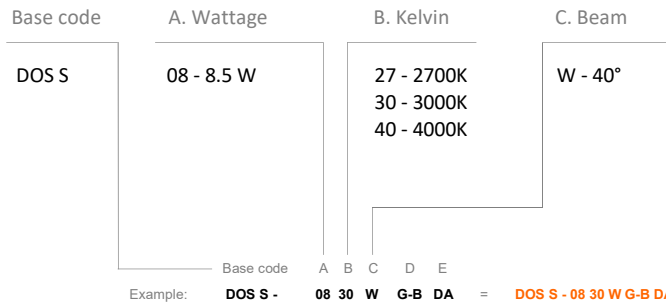

D. Reflector & Trim finish

E. Dimming option

G-B	G-W	ND - Non Dim
BG-B	BG-W	PC - Phase-cut
SG-B	SG-W	AD - Analog
W-B	W-W	DA - Dali
BM-B	BM-W	D2 - Dali 2
C-B	C-W	WD - Dim to warm

dimension

