



NO GLARE
WALLWASHER

OKKIO 60 WW NEW

SPECIFICATIONS


base code	65307
typology	Indoor ceiling mounted wallwasher
mounting	In plasterboard using springs (included)
diameter	60 mm / 2.36"
height	97 mm / 3.82"
required depth	70 mm / 2.76"
ceiling cut out	50 mm / 1.97"
construction	Fixture: turning and milling aluminum. Lens: Polycarbonate
finishes	Powder coated
ingress protection	IP20
lamp quantity	1
lamp type	Power LED. Remote power supply not included
lamp wattage	10W at 48V DC
lamp lumens	1100lm
delivered lumens	870lm
lumen maintenance	50.000h L90
beam	Asymmetric reflector by Bartenbach®: 5° - 90° towards wall
kelvin	2700K CRI93 and 3000K CRI93 / 3 step MacAdam ellipse
special features	Built-in unpolarized electronic system. Hot plug and electronic control of the operating temperature that guarantees that the fixture will last with ambient temperature up to 60° C / 140° F. Designed with asymmetric reflector to produce homogeneous light distribution on the wall and no glare. The wallwash begins directly under the ceiling
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
standards	CE, UL approval pending

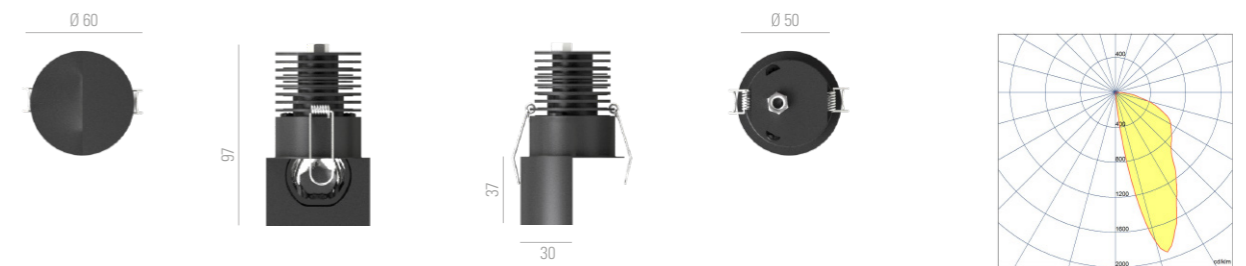

OKKIO 60 WW

ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . BEAM	D . FINISHES	E . OTHER
65307	8 48V DC EXCL. power supply S listed 48V DC EXCL. power supply	5 3000K CRI93 8 2700K CRI93	W Wallwasher	2 black RAL 9005 6 white RAL 9003	
Example: BASE CODE A B C D E = 65307 8 8 W 6 = 65307 88W6					

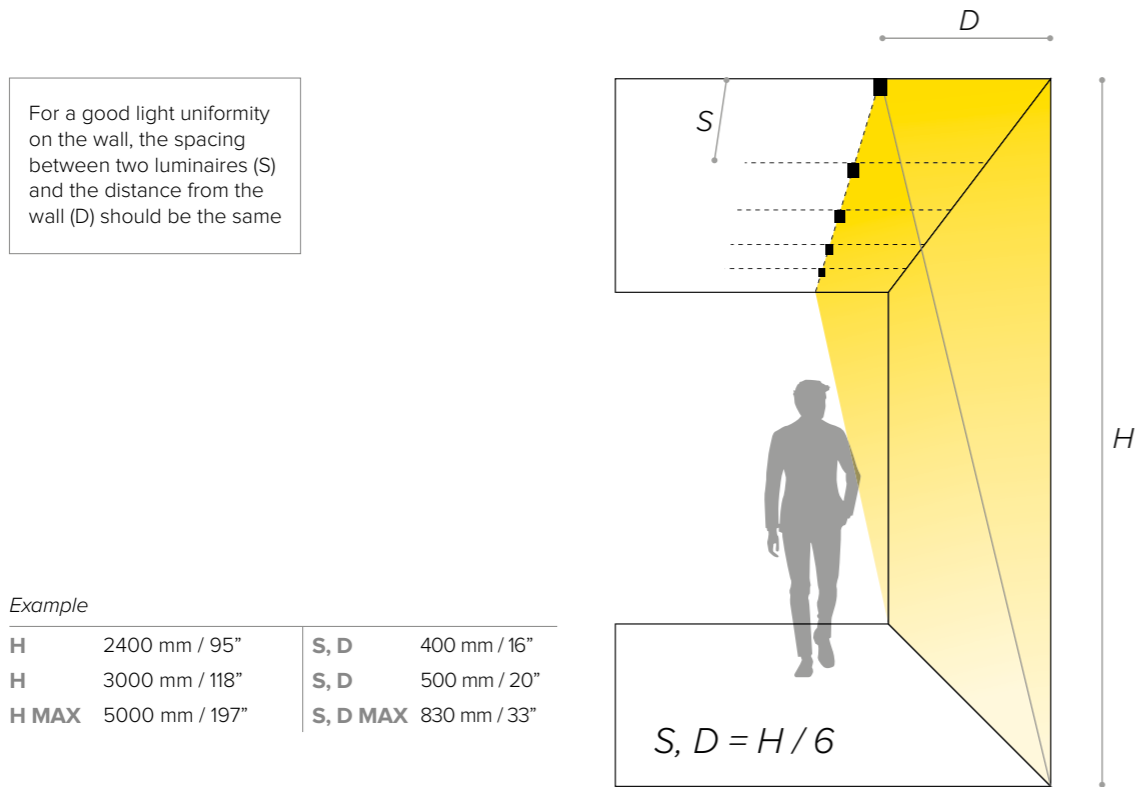

OKKIO 60 WW

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

code	output power	input voltage / frequency	IP	dimensions mm
69180	30W	90-264V	47-63Hz IP20	L160xW46xH30
69181	40W	90-305V	47-63Hz IP67	L163xW43xH32
69182	60W	90-305V	47-63Hz IP67	L163xW43xH32
69187	100W	90-305V	47-63Hz IP67	L220xW68xH39
69188	150W	90-305V	47-63Hz IP67	L228xW68xH39
69096	50W	99-264V	50-60Hz IP20	L124xW79xH22

Power supply 48V DC* ON/OFF



Power supply 48V DC 1-10V and DALI

Class 2 power supply 48V DC

Consult **US distributor** Lites on West
 T: 212.775.6363
 E: info@litesonwest.com

OPTIONAL ACCESSORIES

code	page	description	in/out voltage	IP	dimensions mm
69116/69117		Control unit 24V DC - 48V DC Dimmer interface 0-10V interface	24V DC - 48V DC	IP20	W116xD116xH25
69117	578	SMART DIMM SLAVE 4 DMX interface or dimmer interface slave (four channels max load 240W at 24V DC or 320W at 48V DC)	24V DC - 48V DC	IP20	W116xD116xH25

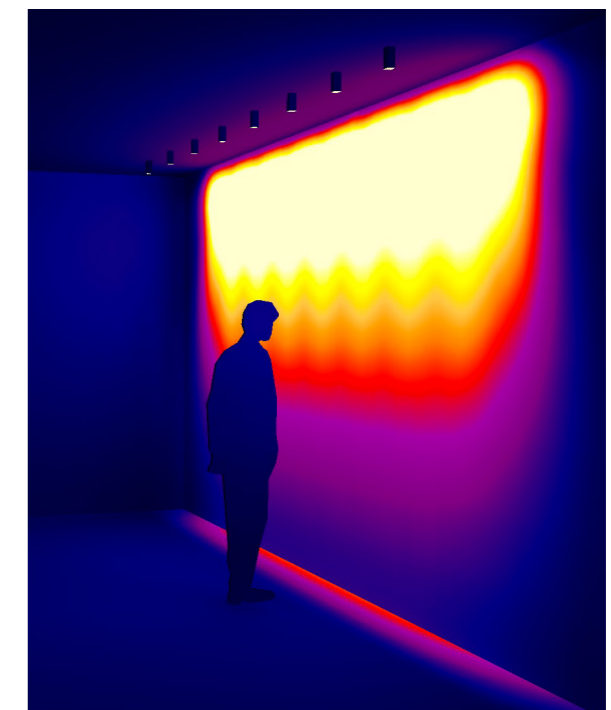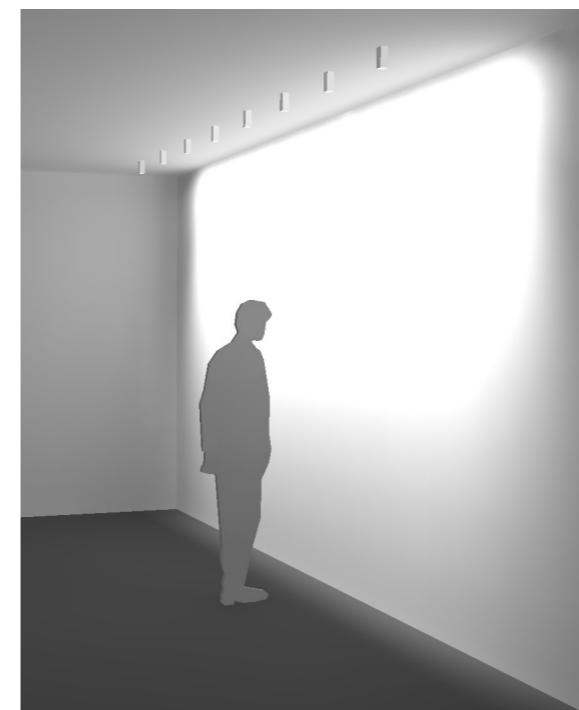

*To choose the power supply, always add a spare 20% as safety margin.
 See pag 597 for cable size and max wiring distance from power supply to last connected luminaire